


MAX-WHH147 SERIES
 MAXIMUM SECURITY WALL MOUNTED

MAXIMUM SECURITY

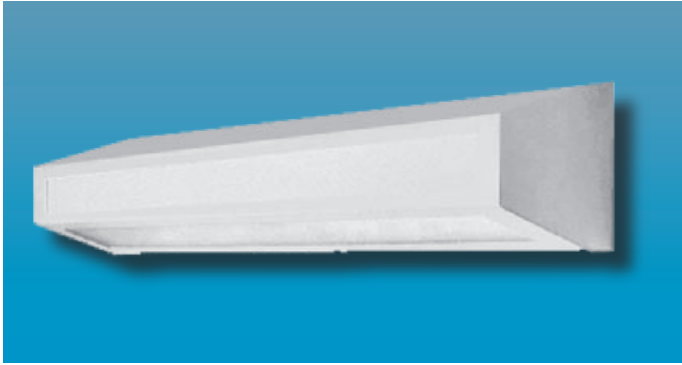

Specifier's Reference	
Project Name	Type
Catalog No.	
Comments	

- **Listings/Certifications:** ETL (US/Canada), damp location listed.

Specifications

- **Housing:** 14 gauge, die-formed cold rolled steel, clamshell design with continuous welded seams. Optional stainless steel housing available.
- **Hinge:** Concealed, continuous formed piano hinge with welded pin ends. Hinge is welded to housing and bolted to back plate.
- **Lens:** Standard .125" thick clear prismatic acrylic with clear polycarbonate overlay. Optional lensing shown below.
- **Lens Retention:** Vertically adjustable "Z" shaped retaining angles secured with through studs and die-cast locknuts.
- **Fasteners:** Fully recessed, captive, center pin reject Allen head standard.
- **Lamps:** See below for lamping options. Lamps supplied by others.
- **Ballasts:** Standard Class P, sound rated A electronic ballasts. Other ballast options available.
- **Finish:** Standard baked white polyester powder coat paint finish. Gloss reflectance 90% salt spray 1000hrs. Optional Agion® antimicrobial finish available.

Ordering Information

Example: **MAX - WHH147 - 4 - 3 - T5 - EB - 8/A - SS - UNV**


Series	Size	No. Lamps	Lamp Type	Ballast Type	Lens Type	Fasteners	Options	Voltage
MAX-WHH147	- [] -	[] -	[] -	[] -	[] -	[] -	[] -	[] -
	-4 Nominal 4' Unit	-3 Three Lamps	-T8 4' 32W 2' 17W	-EB Electronic Ballast Standard	ENVIRONMENT SIDE -4 .375 Clear Polycarbonate (standard)	-F1 Allen Head - center pin reject, standard	-EMG1 1-Lamp Emergency Power Pak	-UNV -347V
		-2 Two Lamps	-T5 4' 28W 2' 14W	-SB Specified Ballast	-8 .375" Clear Tempered Glass	-SF Specified Fastener	-EMG2 2-Lamp Emergency Power Pak.	
			-T5HO 4' 54W 2' 24W		LAMP SIDE -A .125 Prismatic Polycarbonate		-SS Stainless Steel Hous- ing, Brushed Stain- less Steel Door	
					-C .140 DR Prismatic Acrylic		-AG Agion® Antimicrobial Protection in Powder Coat Paint	
					-G .156 Prismatic Tempered Glass		-PL7 7W PL Nightlight	
					-UV .007 UV Absorb- ing Overlay		-LEDNL LED Nightlight	
							-GLR GLR Fusing	

Note: Contact Factory For Additional Configurations.

MAX-WHH147 SERIES
MAXIMUM SECURITY WALL MOUNTED



Dimensions & Mounting

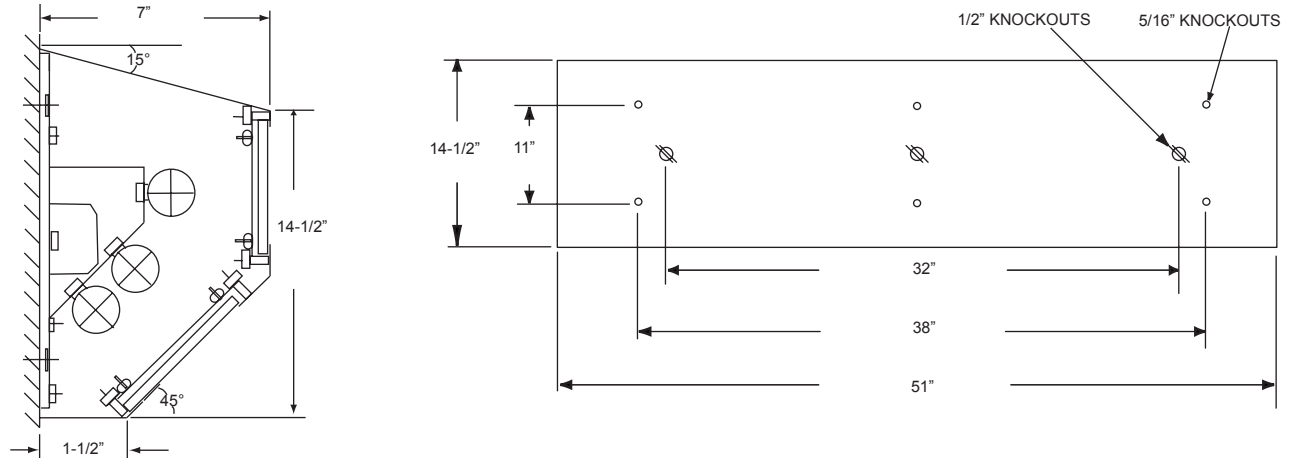

Photometry

CONTACT FACTORY FOR PHOTOMETRICS

Options

Antimicrobial: Agion® Antimicrobial protection using silver technology inhibits bacterial colonization on metal interior and exterior surfaces. Agion™ antimicrobial FDA recognized and EPA registered, meeting all applicable EPA standards.



.125 Prismatic Acrylic
Lens Standard