


SMAX-WHH147 SERIES
 SUPER MAXIMUM SECURITY WALL MOUNTED

SUPER MAXIMUM SECURITY

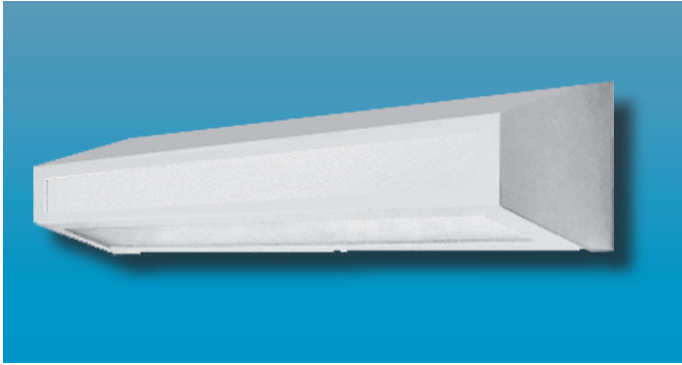

Specifier's Reference	
Project Name	Type
Catalog No.	
Comments	

- **Listings/Certifications:** ETL (US/Canada), damp location listed.

Specifications

- **Housing:** 12 gauge, die-formed cold rolled steel, clamshell design with continuous welded seams. Optional stainless steel housing available.
- **Hinge:** Concealed, continuous formed piano hinge with welded pin ends. Hinge is welded to housing and bolted to back plate.
- **Lens:** Standard .125" thick clear prismatic acrylic with clear polycarbonate overlay. Optional lensing shown below.
- **Lens Retention:** Vertically adjustable "Z" shaped retaining angles secured with through studs and die-cast locknuts.
- **Fasteners:** Fully recessed, captive, center pin reject Allen head standard.
- **Lamps:** See below for lamping options. Lamps supplied by others.
- **Ballasts:** Standard Class P, sound rated A electronic ballasts. Other ballast options available.
- **Finish:** Standard baked white polyester powder coat paint finish. Gloss reflectance 90% salt spray 1000hrs. Optional AgION™ antimicrobial finish available.


Ordering Information

Example: **SMAX - WHH147 - 4 - 3 - T5 - EB10IS - 5/A - SS - UNV**

Series	Size	No. Lamps	Lamp Type	Ballast Type	Lens Type	Fasteners	Options	Voltage
SMAX-WHH147	- [] -	[] -	[] -	[] -	[] -	[] -	[] -	[] -
	-4 Nominal 4' Unit	-3 Three Lamps	-T8 4' 32W 2' 17W	-EB10IS Electronic Ballast <10% THD Instant Start	ENVIRONMENT SIDE -5 .50" Clear Polycarbonate (standard)	-F1 Allen Head - center pin reject, standard	-EMG1 1-Lamp Emergency Power Pak 500 Lumen initial output, 90 minute, 32° start temp.	-UNV -347V
		-2 Two Lamps	-T5 4' 28W 2' 14W	-SB Specified Ballast	-9 .50" Clear Tempered Glass	-SF Specified Fastener	-EMG2 2-Lamp Emergency Power Pak 1100 Lumen initial output, 90 minute, 32° start temp.	
			-T5HO 4' 54W 2' 24W		LAMP SIDE -A .125 Prismatic Polycarbonate		-SS Stainless Steel Housing, Brushed Stainless Steel Door	
					-E .125 Prismatic Polycarbonate		-AG AgION™ Antimicrobial Protection in Powder Coat Paint	
					-G .156 Prismatic Tempered Glass		-PL7 7W PL Nightlight	
					-UV .007 UV Absorbing Overlay		-LEDNL LED Nightlight	
							-GLR GLR/HLR Fuse & Holder set	

Note: Contact Factory For Additional Configurations.

Dimensions & Mounting

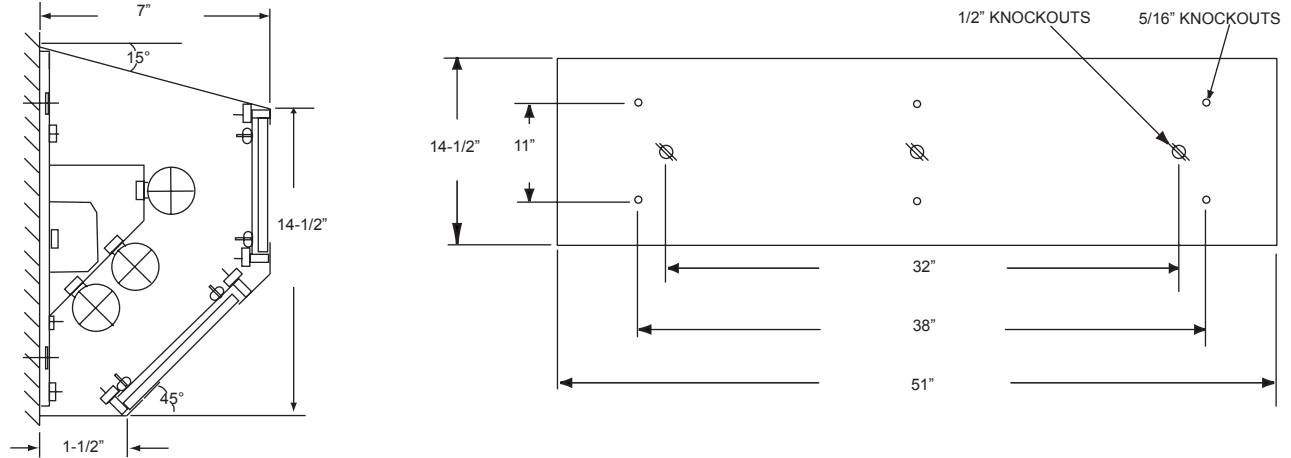

Photometry

CONTACT FACTORY FOR PHOTOMETRICS

Options

Antimicrobial: Agion™ Antimicrobial protection using silver technology inhibits bacterial colonization on metal interior and exterior surfaces. Agion™ antimicrobial FDA recognized and EPA registered, meeting all applicable EPA standards.



.125 Prismatic Acrylic Lens Standard